


NOTES:

1. TECHNOLOGY: SEALED LEAD-ACID, IMMOBILIZED ELECTROLYTE. CONTAINS NO FREE LIQUID.
2. CAPACITY: 12 AMPERE-HOURS
3. WEIGHT: 11 POUNDS
4. OPERATING POSITION: ANY
5. TEMPERATURE – OPERATING AND STORAGE: -30C TO +60C.
6. ALTITUDE: -1000 TO 30,000 FEET
7. TERMINALS: USE 3/16" DIA RING TERMINALS.
8. RECOMMENDED CHARGING VOLTAGES:  
FLOAT VOLTAGE FOR STORAGE: 13.2 @ 40 DEGREES C; 13.8 AT 20 DEGREES C; 14.4 AT 0 DEGREES C; 15.0 @ -20 DEGREES C.
9. CHARGING VOLTAGE FOR OPERATIONS: 14.2 TO 14.6 VOLTS D.C.
10. CHARGING CURRENT LIMIT: NONE
11. WARNING – CONTAINS HAZARDOUS MATERIALS (LEAD AND SULFURIC ACID). CASE IS SEALED AND SHOULD NOT BE OPENED. FAULT CURRENTS OF UP TO 1200 AMPS MAY BE EXPECTED IF BATTERY IS INADVERTENTLY SHORTED. ALL BATTERY HANDLING SAFETY PRACTICES SHOULD BE OBSERVED.
12. APPROVED DISPOSAL: HANDLE PER LOCAL REGULATIONS LIKE ANY OTHER LEAD-ACID, VEHICULAR BATTERY.
13. CAUTION – OBSERVE POLARITY WHEN INSTALLING. REVERSAL OF LEADS WILL DAMAGE OTHER DEVICES IN THE AIRCRAFT.

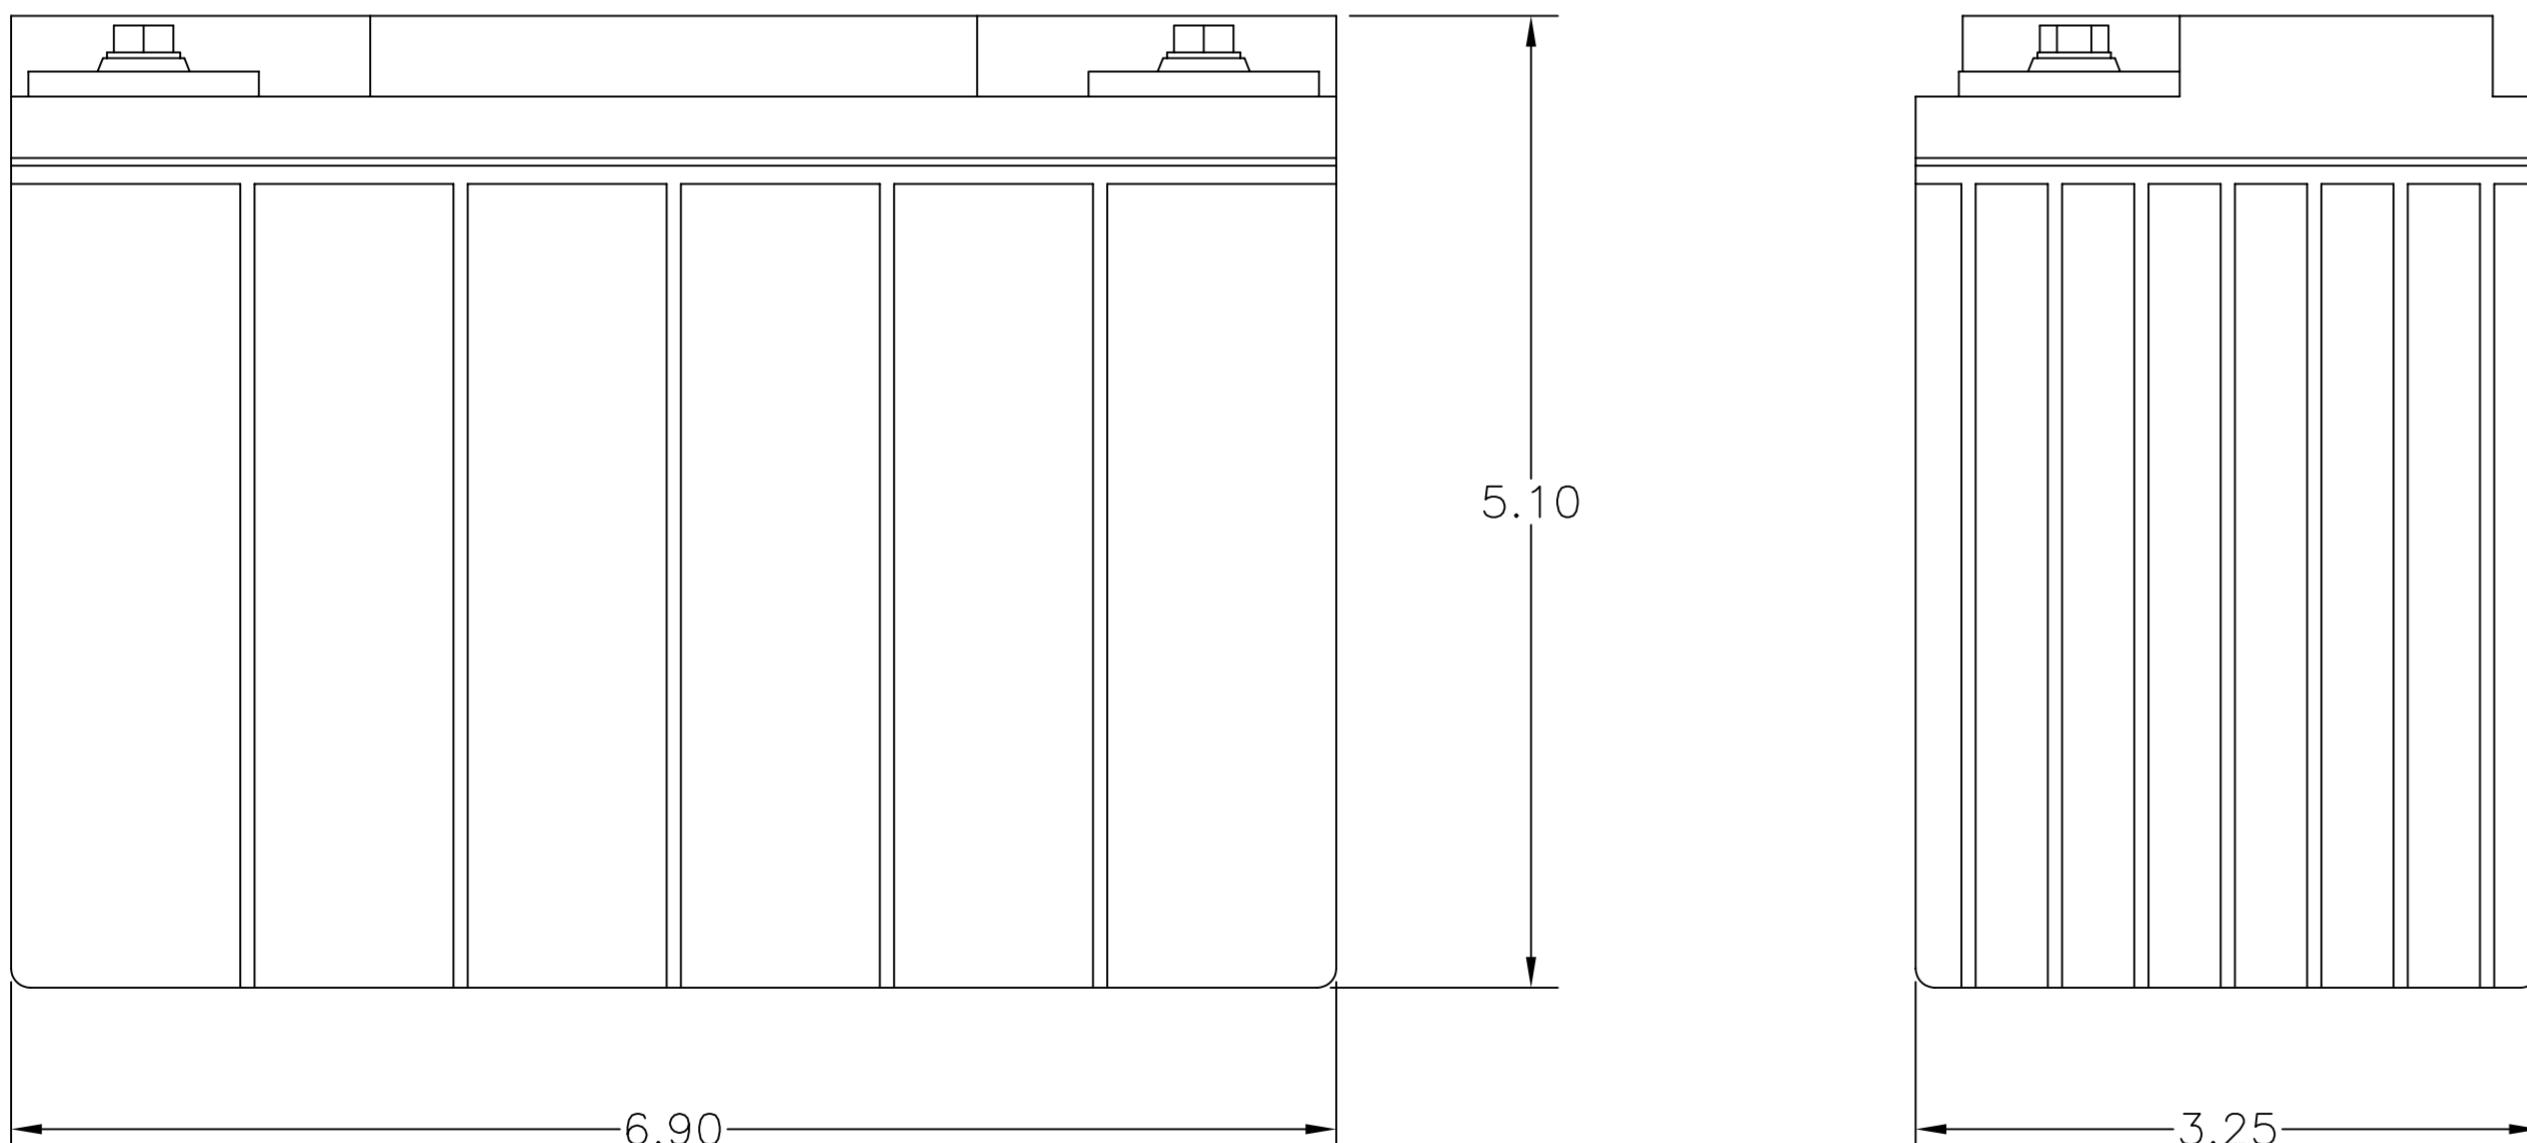

(-1)

BATTERY, 12V, 12 AH

B & C Specialty Products  
P.O. Box B, Newton, Kansas 67114

TITLE ENVELOPE DRAWING  
BATTERY, 12V, 12 A.H.  
SEALED LEAD ACID

DRAWING NO.	BC103	REVISION A
		DATE 11/26/96
SCALE	JOB NO.	SHEET 1 OF 1