
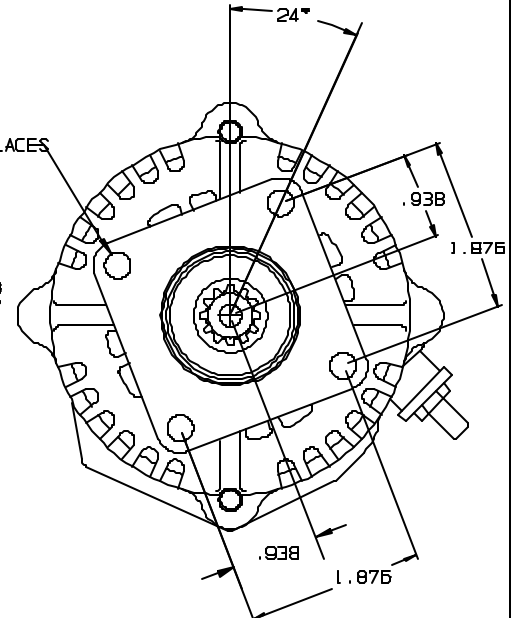
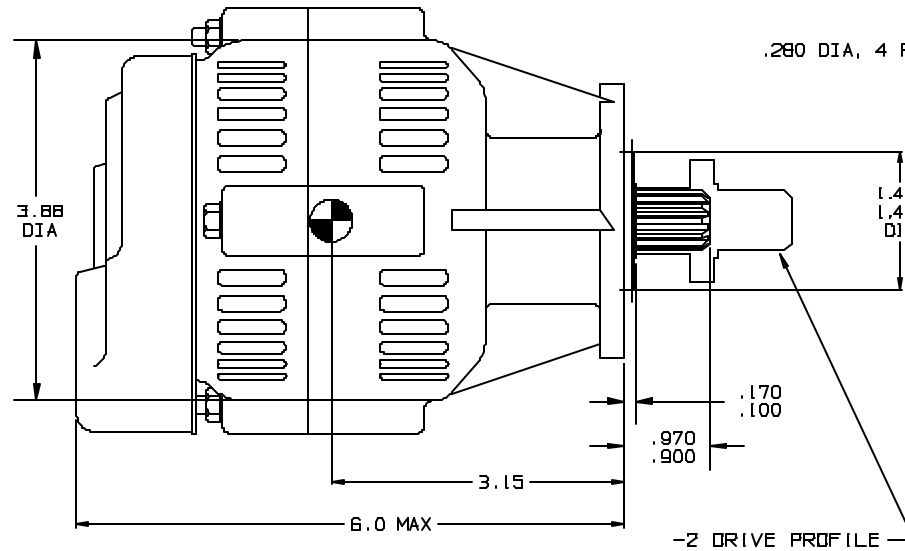


REV	DATE	DESCRIPTION
A	8/26/97	ADDED 24 DEG DIMENSION
B	5/20/98	REMOVED SPLINE CALLOUT; ADDED 4.58 DIM & REF. NOTE
C	8/18/99	TBO WAS 1600 HRS.
D	11/27/06	ADDED -2 VERSION FOR PT6

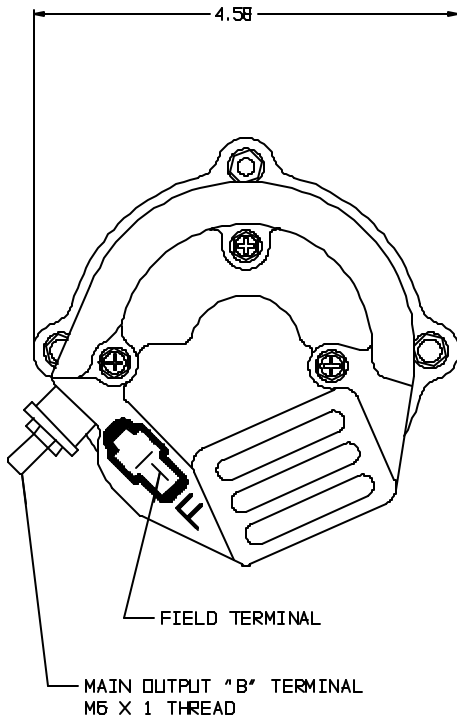

- NOTE: 1. ALL DIMENSIONS FOR REFERENCE ONLY
 2. RECOMMENDED INTERVAL BETWEEN OVERHAUL IS 1700 HRS.

-1 ALTERNATOR 14/28V, 20 AMP

WEIGHT: 5.72 LBS.
 MAX STATOR TEMP: 300°F
 FOR USE ON AND20000 ACCESSORY PAD.
 ALL DIMENSIONS ARE REFERENCE ONLY
 OVERHANG MOMENT 18.0 IN-LBS.
 MAX CONTINUOUS RPM: 10,000

1	410-100-2	ALTRNTR ASSY, 14/28V, 20A, PT6
1	410-100-1	ALTERNATOR ASSY, 14/28V, 20A
	-1	ALTERNATOR, 14/28V, 20A
-2	-1	PART NO.
USED ON		DESCRIPTION
UNLESS OTHERWISE SPECIFIED		B & C Specialty Products P.O. Box 8, Newton, Kansas 67114
DIMENSIONS ARE IN INCHES TOLERANCES ARE: DECIMAL 0.XX = ± 0.03 DECIMAL 0.XXX = ± 0.010 ANGLES = ± 0.5 DEGREES		TITLE ENVELOPE DRAWING AIRCRAFT ALTERNATOR, 14/28 VOLT, 20 AMP
ENGINEER	NAME MICKOLLS	DATE 8-31-95
DRAWN	CLS	8-31-95
CHECKED	TH	8/13/98
PROJECT		
DRAWING NO. BC410		REVISION D
SCALE		DATE 11/27/06
JOB NO.		SHEET 1 OF 1