


NOTE

The N.C., N.O., and COM connections use .25" FastOn terminals. The (-) and (+) connections use .1875" FastOn terminals

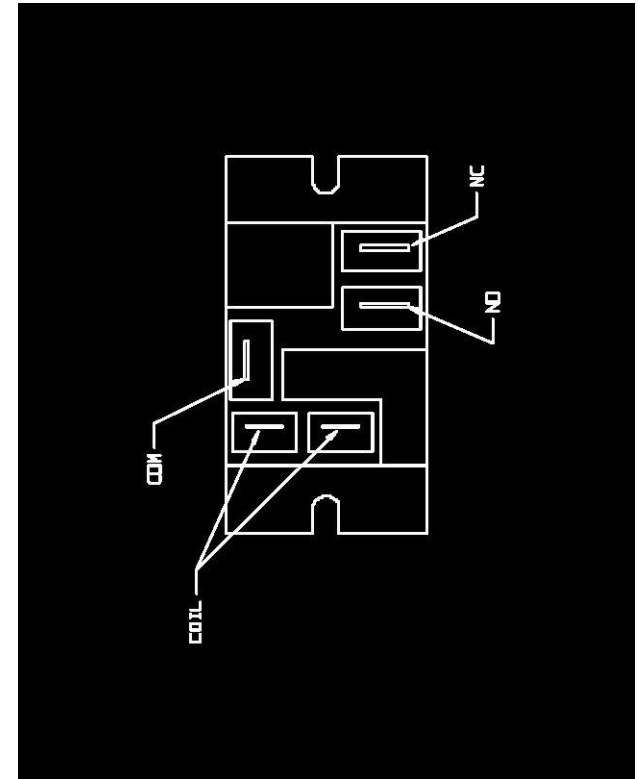

Relays

S704-1 / S8005-1
OR
S704-2 / S8005-2

**PM Alternator Disconnect Relay
Installation Tips**

Rev. C (5/13/16)