



123 East 4th St, P.O. Box "B" · Newton KS 67114-0894
Telephone (316) 283-8000 · Fax (316) 283-7400

The B&C Standby Alternator System for the Piper PA32

The B&C Standby Alternator system offers improved safety of flight for owners of Piper PA32 aircraft, with ease of operation and exceptional dependability. STC/PMA approved for installation on all Piper PA32, Cherokee Six, Lance and Saratoga models (including those with turbocharged engines). Eligible serial numbers are detailed on page 3.



In operation, the B&C Standby Alternator system monitors the aircraft bus voltage in the background, automatically signaling its operation to the pilot through a panel-mounted annunciator light (which also doubles as a standby alternator load monitor). If the primary alternator should fail in flight, the Standby Alternator system will sense the resulting drop in bus voltage and automatically activate. Rated to provide 20 amps of power to support continued flight, if load requirements exceed 20 amps the panel-mounted annunciator will flash, alerting the pilot to the condition. Reducing load usage to 20 amps or less will cause the annunciator to cease flashing and illuminate in a steady state. The pilot may choose equipment needed for the given flight conditions by simply keeping the total load below the flashing point of the

annunciator. This will reserve battery energy for transient loads, (gear, flaps, landing lights, etc.) during approach. Loads may be beyond the flashing point of the annunciator for up to five (5) minutes without damaging the standby alternator.

Installation Notes

The B&C Standby Alternator is mounted on the hydraulic accessory drive pad on the Lycoming “dual mag” (2-in-1 magneto) drive engines. The BC410 will not fit turbocharged aircraft with the TIO-540-S1AD powerplant.

On engines with two separate magnetos, the Standby Alternator is mounted on the vacuum pump drive and the vacuum pump is re-located to the hydraulic accessory drive pad. Lycoming parts needed to complete the hydraulic accessory drive are not included in the installation kit and must be purchased separately.

Panel mounted equipment includes a STBY ALT ON annunciator light, a STBY ALT rocker switch (purchased separately to match the existing switches) and three standard pull-type circuit breakers (1 amp, 5 amp and 40 amp). Appropriate placards are provided for each panel mounted device. The regulator is mounted in the area between the instrument panel and the firewall.

B & C Specialty Products Inc.
STC No. SA01066WI
PA32 Standby Alternator Approved Models List

Model	Model Name	Serial Numbers
PA-32-260	CHEROKEE SIX - 260	32-03, 32-04, 32-1 THRU 32-1297, 32-7100001 THRU 32-7800008
PA-32-300	CHEROKEE SIX - 300	32-15, 32-21, 32-40000 THRU 32-40974, 32-7140001 THRU 32-7940290
PA-32S-300	CHEROKEE SIX - 300 SEA PLANE	32S-15, 32S-40000 THRU 32S-40974, 32S-7140001 THRU 32S-7240137
PA-32R-300	LANCE	32R-7680001 THRU 32R7880068
PA-32RT-300	LANCE II	32R-7885002 THRU 32R-7985106
PA-32R-301	SARATOGA SP	32R-8013001 THRU 32R-8613006, 3213001 THRU 3213028, 3213030 THRU 3213041
PA-32R-301	SARATOGA II HP	3213029, 3213042 THRU 3213103 (14V), 3246001 THRU 3246017 (14V), 3246018 & UP (28V)
PA-32-301	SARATOGA	32-8006002 THRU 32-8606023, 3206001 THRU 3206019, 3206042 THRU 3206044, 3206047, 3206050 THRU 3206055, 3206060
PA-32R-301T	SARATOGA II TC	3257001 & UP
PA-32-301XTC	PIPER 6XT	3255001 & UP
PA-32-301FT	PIPER 6X	3232001 & UP

Supplemental Type Certificate

SAMPLE

Number SA01066WI

This certificate issued to B & C Specialty Products, Inc.
123 E. 4th Street
Newton, KS 67114-0894

certifies that the change in the type design for the following product with the limitations and conditions therefor as specified hereon meets the airworthiness requirements of Part 3 of the Civil Air Regulations.

Original Product - Type Certificate Number : A3SO

Make : Piper

Model : PA-32-260, PA-32-300, PA-32S-300, PA-32R-300, PA-32RT-300,
PA-32R-301, PA-32-301, PA-32R-301T, PA-32-301T, PA-32RT-300T, PA-32-301XTC, PA-32-301FT

Description of Type Design Change: Installation of B&C Specialty Products BC410-1 Standby Alternator System. Data Required: (1) B&C Specialty Products, Inc. Drawing List No. 410LST3.DOC, Revision (-), dated June 4, 2001; (2) B&C Specialty Products Document No. FMS410-3, FAA Approved Airplane Flight Manual Supplement, dated April 3, 2002; or later FAA Approved Revisions to (1) or (2).

Limitations and Conditions: Compatibility of this design change with previously approved modifications must be determined by the installer.

If the holder agrees to permit another person to use this certificate to alter the product, the holder shall give the other person written evidence of that permission.

This certificate and the supporting data which is the basis for approval shall remain in effect until surrendered, suspended, revoked or a termination date is otherwise established by the Administrator of the Federal Aviation Administration.

Date of application : June 7, 2001

Date reissued :

Date of issuance : April 3, 2002

Date amended : November 6, 2006



By direction of the Administrator

Harvey E. Nero


(Signature)

Harvey E. Nero
FAA Program Manager
Wichita Aircraft Certification Office

(Title)

Any alteration of this certificate is punishable by a fine of not exceeding \$1,000, or imprisonment not exceeding 3 years, or both.

REV	DATE	DESCRIPTION
A	8/26/97	ADDED 24 DEG DIMENSION
B	5/20/98	REMOVED SPLINE CALLOUT; ADDED 4.58 DIA & REF. NOTE
C	8/18/99	TBD WAS 1600 HRS.
D	11/27/06	ADDED -2 VERSION FOR PT6

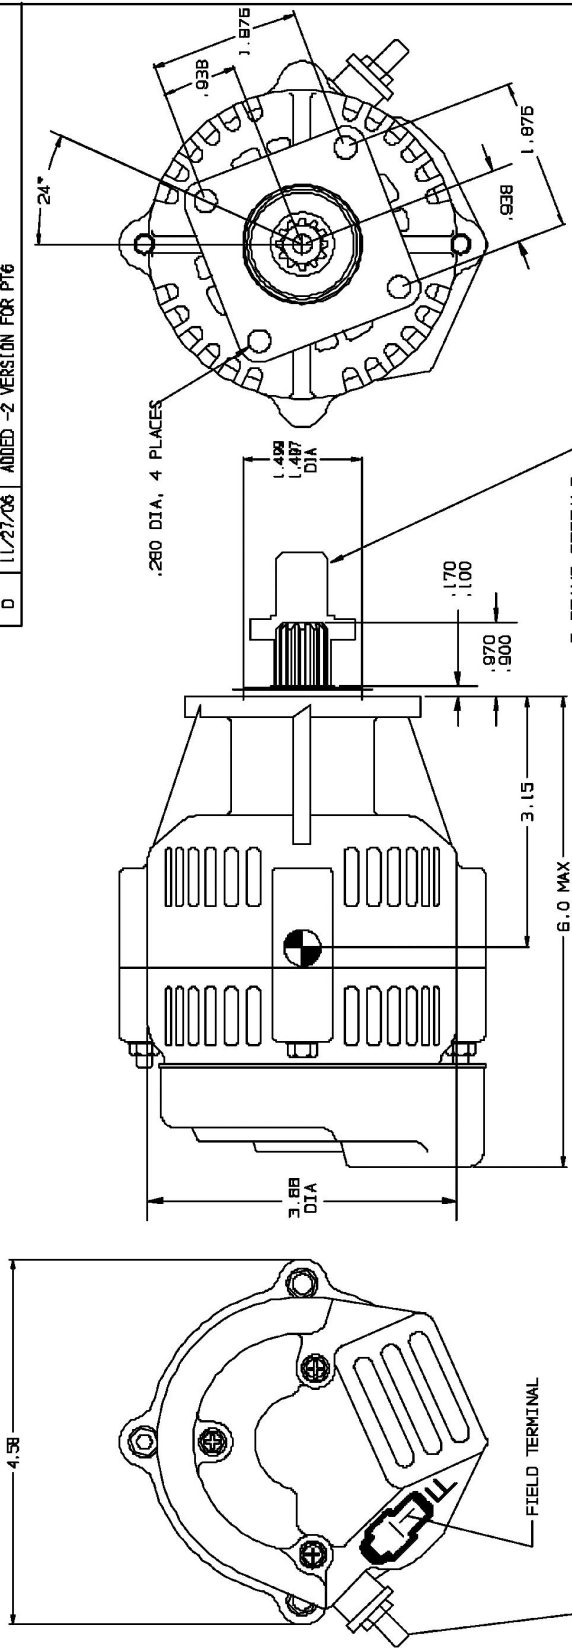

NOTE: 1. ALL DIMENSIONS FOR REFERENCE ONLY
 2. RECOMMENDED INTERVAL BETWEEN OVERHAUL IS 1700 HRS.


-1 ALTERNATOR 14/28V, 20 AMP

WEIGHT: 5.72 LBS.
 MAX STATOR TEMP: 300° F
 FOR USE ON AND 20000 ACCESSORY PAD.
 ALL DIMENSIONS ARE REFERENCE ONLY
 OVERHANG MOMENT 18.0 IN-LBS.
 MAX CONTINUOUS RPM: 10,000

REV	DATE	DESCRIPTION
1	410-100-2	ALTRNTR ASSY, 14/28V, 20A, PT6
	1	410-100-1 ALTERNATOR ASSY, 14/28V, 20A
		-1 ALTERNATOR, 14/28V, 20A
-2	-1	PART NO.
		USED ON

UNLESS OTHERWISE SPECIFIED		DESCRIPTION	
DIMENSIONS ARE IN INCHES		B & C Specialty Products	
TOLERANCES ARE:		P.O. Box B, Newton, Kansas 67114	
FRACTIONS - .005		TITLE	
DECIMALS - .0005		ENVELOPE DRAWING	
ANGLES - 30.0 DEGREES		AIRCRAFT ALTERNATOR,	
		14/28 VOLT, 20 AMP	
ENGINEER	NAME	DATE	REVISED D
DRAWN	DATE	8-31-99	DATE 11/27/06
CHECKED	DATE	8/13/98	SCALE
PROJECT	SCALE	BC410	JOB NO.
			SHEET 1 OF 1

SYMBOL	REVISION	DRAWN	APPROVED
C	ADDED PA-32R-301T, PA-32-301T, PA-32RT-300T, PA-32-301XTC, PA-32-301FT UPDATED S-N'S ON PA-32-301	TH	10/11/06
D	1. CHANGED PANEL CUTOOUT DIM'S ON PG. 4 2. ADDED ITEM 28 ON PAGE 1 3. ADDED KIT PART NUMBERS: 410-501-1-KIT 410-501-2-KIT	WB	11/9/12

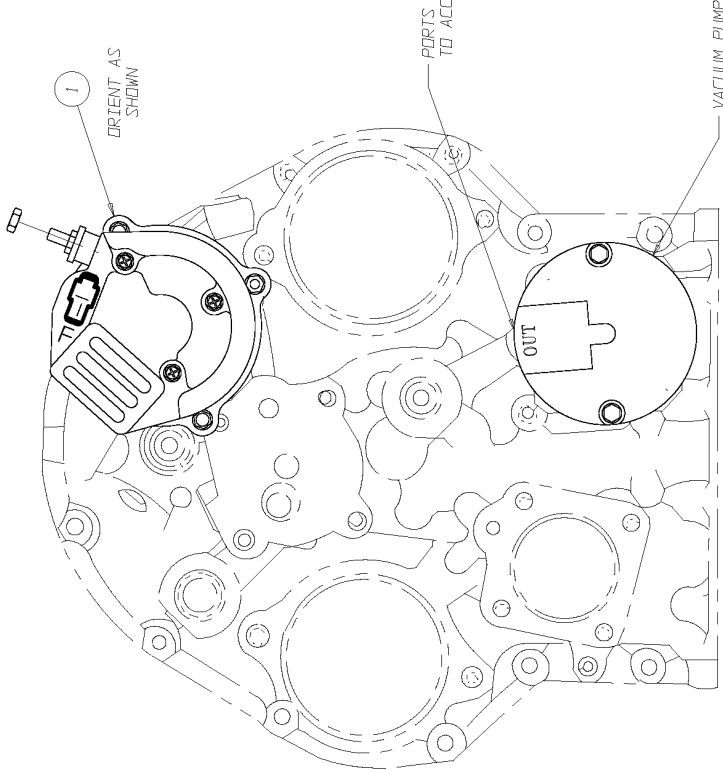


PORTS MAY BE ORIENTED AS NECESSARY TO ACCOMMODATE VACUUM PLUMBING

VACUUM PUMP

ALTERNATOR INSTALLATION INSTRUCTIONS (D-540-E4B5, ID-540-K1A5, ID-540-K1G5, & IID-540-AH1A ENGINES):

- DISCONNECT VACUUM PUMP. REMOVE VACUUM PUMP FROM ACCESSORY ADAPTER. REMOVE COVER PLATE FROM LOWER ACCESSORY CASE DRIVE AREA. RETAIN ALL HARDWARE. REMOVE ALL OLD GASKET MATERIAL FROM ALL GASKET SURFACES BEING CAREFUL NOT TO DAMAGE ALUMINUM SURFACES.
- INSTALL HYDRAULIC PUMP DRIVE ADAPTER ON LOWER ACCESSORY CASE DRIVE PAD PER LYCOMING SERVICE MANUAL. D-540 HYDRAULIC DRIVE CONSISTS OF:
HOUSING, LYC P/N 71675;
THRUST WASHER, LYC P/N 71596;
GASKET, LYC P/N 68315
GEAR, LYC P/N 72964
SEAL, LYC P/N 06A19956
- PLACE A NEW GASKET, ITEM 14, ON STUDS OF EACH ACCESSORY DRIVE ADAPTER. INSTALL VACUUM PUMP THAT IS SUITABLE FOR CLOCKWISE ROTATION ON LOWER ACCESSORY DRIVE ADAPTER. INSTALL ALTERNATOR ON UPPER ACCESSORY DRIVE ADAPTER WITH OUTPUT POST CLOKCKED TO THE POSITION SHOWN.
- SECURE THE VACUUM PUMP AND ALTERNATOR WITH NUTS, LOCKWASHERS, AND FLAT WASHERS RETAINED FROM STEP 1 ABOVE. TORQUE NUTS TO 90 - 110 IN-LBS.
- RE-PLUMB VACUUM HOSES TO APPROPRIATE PORTS OF VACUUM PUMP.

ITEM	USED ON	PART NO.	DESCRIPTION
	-1		
UNLESS OTHERWISE SPECIFIED			
DIMENSIONS ARE IN INCHES			
TOLERANCES ARE:			
FINISH: CLASS # 4.0, 3.0			
ANGLES: # 40.5 DEGREES			
ENGINEER	NAME	DATE	
DRAWN	TH	5/14/01	REVISION
CHECKED	TH	5/14/01	DATE
PREFECT			
DRAWING NO. 410-506		SCALE FULL	
TITLE INSTALLATION, BC410 ON PIPER PA32/32R SERIES ACFT		JOB NO. PAGE 2	

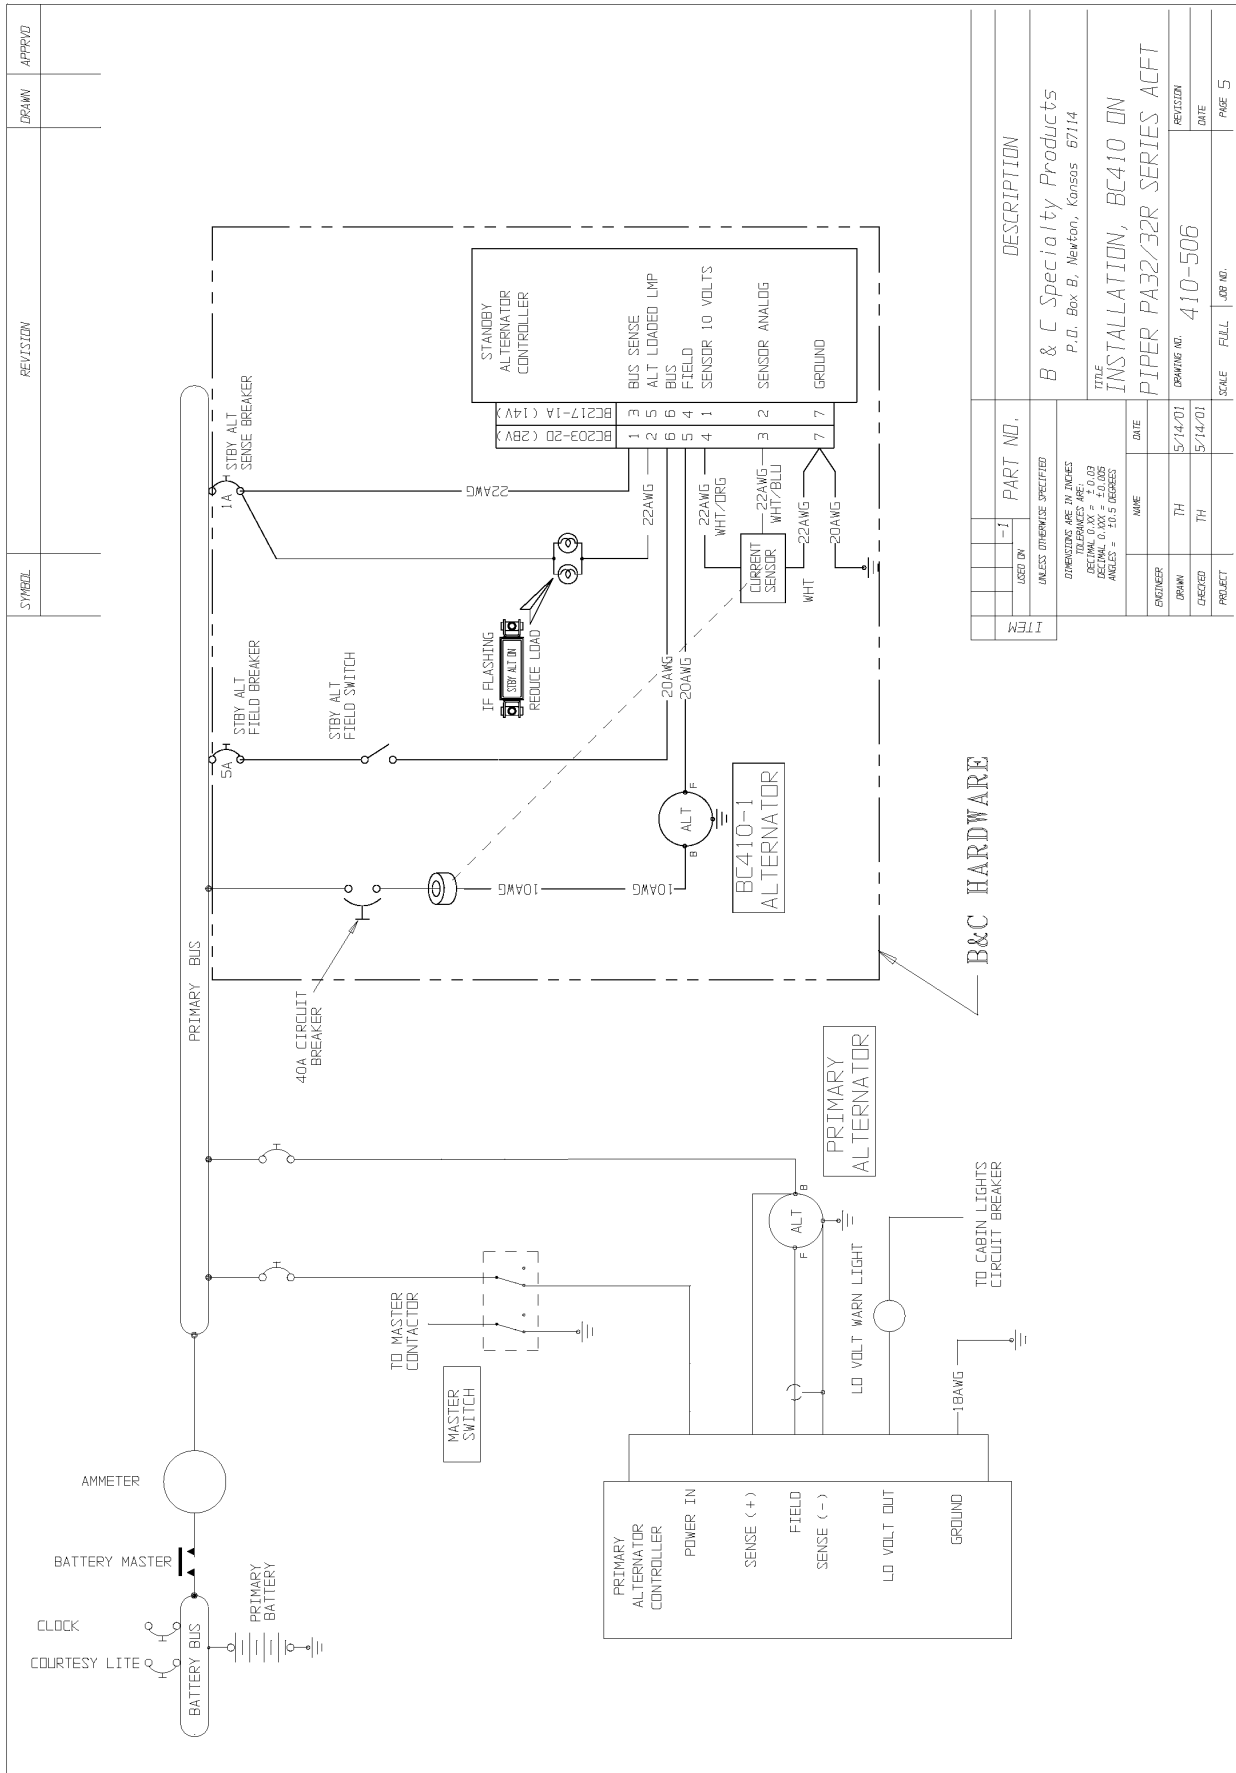

B&C HARDWARE

ITEM	QTY	DESCRIPTION
	1	PART NO.
UNLESS OTHERWISE SPECIFIED		
DIMENSIONS ARE IN INCHES		
TOLERANCES ARE:		
FRACTIONS = ±0.005		
DECIMALS = ±0.001		
ANGLES = ±0.5 DEGREES		
ENGINEER	DATE	REVISION
DRAWN	TH	5/14/01
CHECKED	TH	5/14/01
PROJECT		
DRAWING NO. 410-506		JOB NO.
SCALE	FULL	PAGE 5

DESCRIPTION

B & C Specialty Products
P.O. Box B, Newton, Kansas 67114

TITLE
INSTALLATION, BC410 ON
PIPER PA32/32R SERIES ACFT

Range of Applications

The B&C Specialty Products Standby Alternator System has been installed in thousands of certified aircraft over the past 20 years. It has been factory-installed on the Mooney Ovation and Acclaim since June 1996; on the Beech Bonanza since mid-2000; and on the Quest Kodiak since 2008. B&C also holds an STC for installation of the Standby Alternator system in Cessna 210 aircraft, and has cooperated on an STC/PMA installation for Cessna 182 and 206 aircraft with Lycoming engines (contact us for more details).

For individuals interested in obtaining one-time field approvals on aircraft not yet covered by the STC, a general system wiring diagram has been provided in this brochure to assist in these efforts. We will continue to work on STC's for other models. Please let us know if you are interested in the Standby Alternator system for your aircraft – and feel free to call if you have any questions.

Pricing

BC410-1 Alternator and Regulator w/ STC (specify 14v or 28v)	\$2715.00
410-506 Installation Kit (specify 14v or 28v)	\$575.00